

LF46 Series LED Flood Light



Products description and application

LF46 series LED flood light, it can aim in any direction, and has a structure that is not affected by weather conditions. Provide energy-saving and low-maintenance lighting solutions, with a variety of optical lenses, to provide a stable and comfortable lighting effect for the lighting area, so that the staff can focus more on work safety and work efficiency. It is mainly used for industrial lighting in ports, wharfs, large-area operations mines, airports, stadiums and other places.



Features

- o Highly reliable, efficient LED light source, long life, energy saving and environmental protection.
- o Integrated design of fin-type lamp housing, strong integrity, sufficient heat dissipation, light weight and good shock resistance.
- o Special spraying process, oxidation resistance, corrosion resistance, fully sealed structure, suitable for high salinity coastal areas.
- o The back angle structure design prevents water and dust accumulation.
- o Equipped with a waterproof and breathable valve to balance the temperature and pressure inside and outside the cavity to protect the LED light source device.
- o The product has multiple color temperature options, good color rendering, anti-glare and good visual effect.
- o The vertical angle of the mounting bracket is adjustable from 0° to 180° (5° per grid), suitable for lighting in a variety of different positions.
- o Various dimming modes such as 1-10V/PWM/time control can be customized.
- o Comes standard with anti-dropping chain and damping pad.

General Specifications

Standards compliant

CE:

EN60598-1、EN60598-2-5、EN62493、EN62471、EN55015、EN61547、EN61000-3-2、EN61000-3-3

Electrical

Operating voltage	120-277VAC
Power consumption	300W 400W
Frequency	50/60Hz
Power factor	PF>0.95
EMC	IEC61000-4-2 Contact discharge: ±8KV Air discharge: ±15KV IEC61000-4-3 800~1000MHz 10V/m IEC61000-4-4 ±2KV IEC61000-4-5 L-N: ±6KV L,N-PE: ±10KV IEC61000-4-6 0.15~80MHz 10V/m EN55015

Wiring Lead wire/ Cable gland

Mechanical

Base color	Silver
Housing material	Aluminum alloy
Cover material	PC
Finish treatment	Powder coating
Weight	13.5 kg
Mounting	Mounting brackets
Operating temperature	-40°C ~ +50°C(over-heat protection)
Anti-vibration	IEC60068-2-6 5g
IP Rate	IEC60529 IP67
Salt spray rate	ISO9227 720h

Photometric


Light source	LED	LEDs lifetime	≥60000h
Color temperature	5700K 4000K 2700K	Beam angle	15° /25° /60°
Lumen per Watt	Ra≥70 Ra≥70 Ra≥80		
CRI	140 lm/w 130 lm/w 110 lm/w		

LF46 Series LED Flood Light



Mounting dimensions

Unit: mm

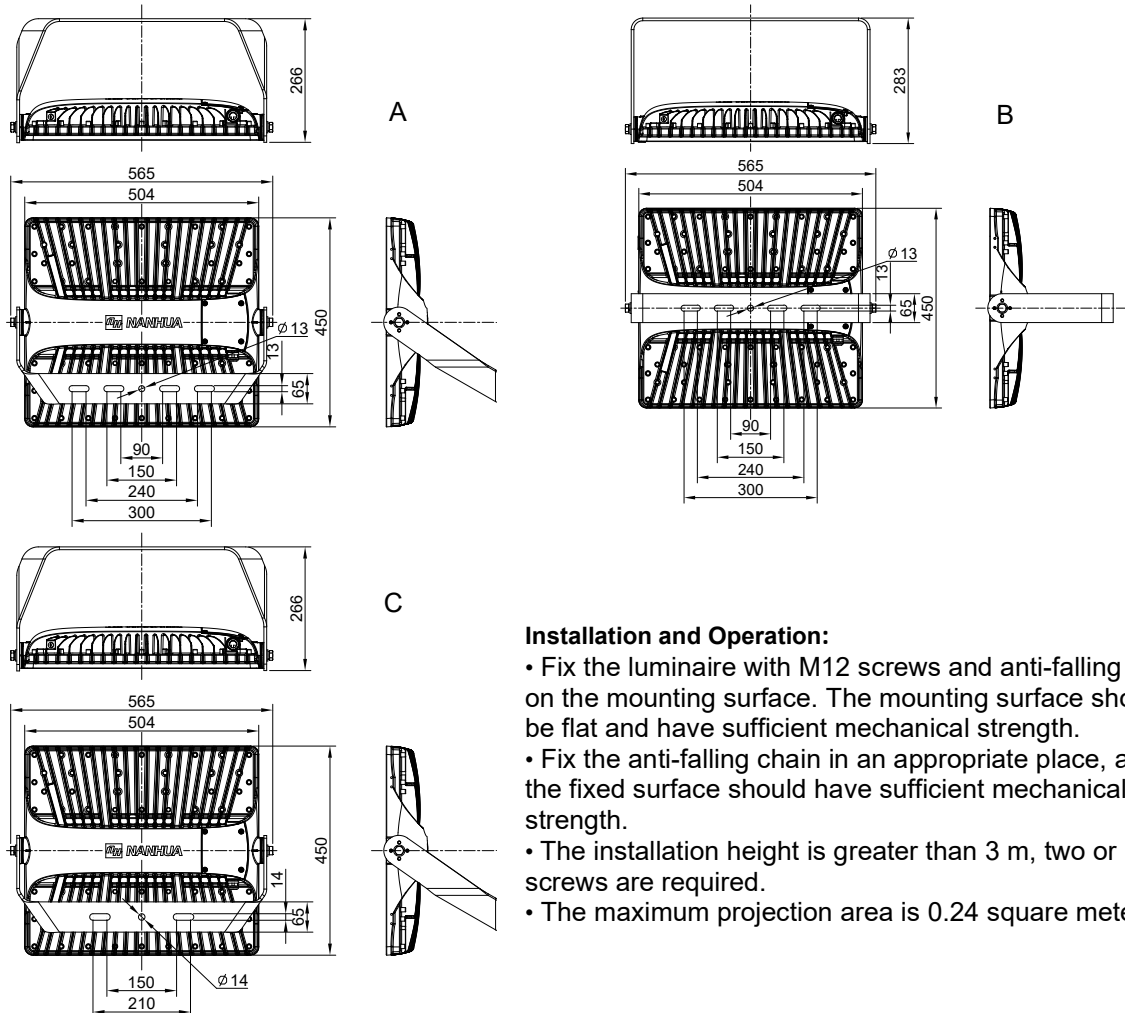


Installation and Operation:

- Fix the luminaire with M12 screws and anti-falling nuts on the mounting surface. The mounting surface should be flat and have sufficient mechanical strength.
- Fix the anti-falling chain in an appropriate place, and the fixed surface should have sufficient mechanical strength.
- The installation height is greater than 3 m, two or more screws are required.
- The maximum projection area is 0.24 square meters.

Wiring diagram

Internal wiring (Lead wire type)

AC/DC
Power: 300W、400W

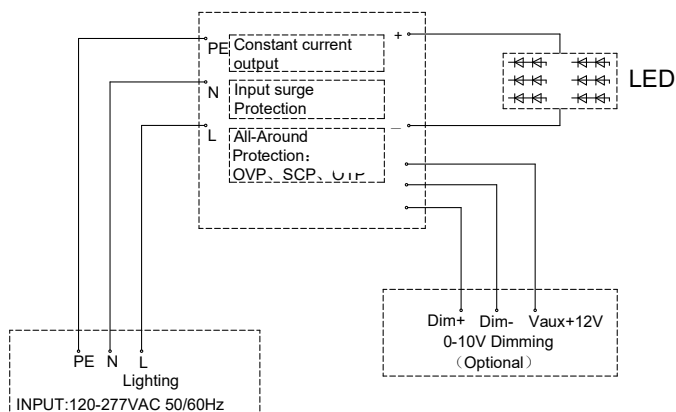

Wiring method:


- The external power cord of the lamp must meet at least 15AWG (1.5mm²) or more three-core sheathed wire.
- Connect the lead wires directly to the L, N, and earth terminals.
- After connecting the power cord, it can work after turning on the power.

LF46 Series LED Flood Light




Distribution curve flux


15° Distribution curve flux

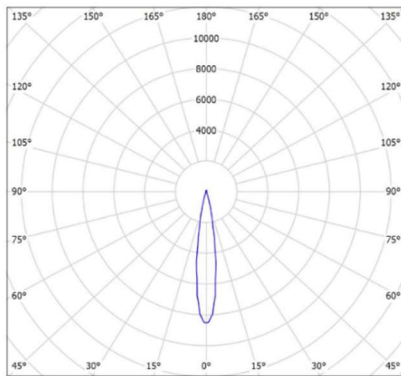


25° Distribution curve flux

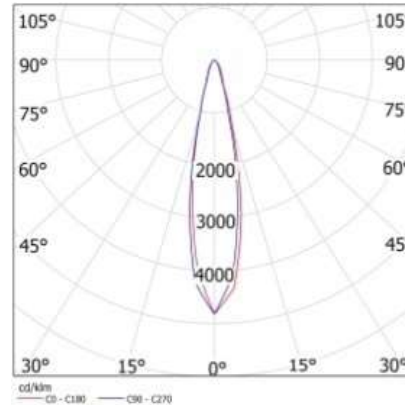

60° Distribution curve flux

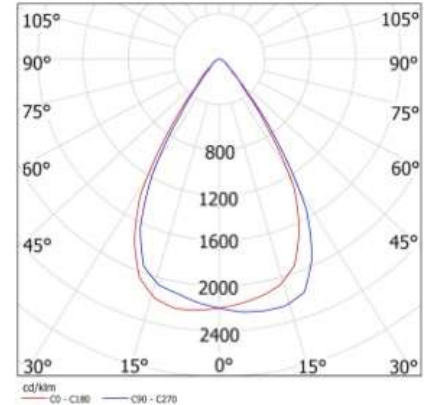

Precautions

1. The PC material parts of the product should not be in direct or indirect contact with industrial alcohol, banana oil, isopropanol, carbon tetrachloride, cyclohexanone and other organic solvents, otherwise there will be a risk of corrosion and cracking.
2. Please connect to the rated working voltage when using.
3. The lamps are not suitable to be covered by heat insulation materials and keep good ventilation.
4. The lamp is not suitable to be directly installed on the surface of ordinary combustible materials.
5. The shortest distance between the lamp and the illuminated object is 3 meters to avoid fire.
6. When the lamp is in use, there is a certain temperature rise on the surface of the shell and lampshade, which is a normal phenomenon.
7. To replace and maintain the lamps, the power supply should be cut off first, and the lamps should be cooled down by professionals.
8. Please read the manual carefully before use, if you have any questions, please contact our company.
9.  "Do not stare at the operating light source" "The luminaire should be positioned so that prolonged staring into the luminaire at a distance closer than 10,976 m is not expected".
10. To reduce the risk of strangulation the flexible wiring connected to this luminaire shall be effectively fixed to the wall if the wiring is within arm's reach.
11. For non-replaceable light sources (for glass lamp cover models):The light source of this luminaire is not replaceable; when the light source reaches its end of life the whole luminaire shall be replaced.
12. For non-user replaceable light sources (for plastic lamp cover models):"The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person".
13. For type Y attachments: if the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.

LF46 Series LED Flood Light



Selection table


LF46-①②③④⑤⑥

①Voltage	②Power	③Color temperature	④Beam angle	⑤Wiring	⑥Mounting
B 120-277VAC	400 400W	C 5700K	N 15°	1 1-M20*1.5 Cable gland(φ 10~14mm)	A Mounting bracket (Tilt/SUS316/6mm/90~150mm and 240~300mm)
	300 300W	W 2700K	M 25°	2 Lead wire 2m	B Mounting bracket (U type/SUS316/6mm/90~150mm and 240~300mm)
		N 4000K	W 60°		C Mounting bracket (Tilt/SUS316/6mm/150~210mm)

How to Order

P/N	Model	Power (W)	Voltage	Color temperature	Beam angle	Wiring	Mounting
-----	-------	-----------	---------	-------------------	------------	--------	----------

Correct Disposal of this product

	<p>This marking indicates that this product should not be disposed with other household wastes throughout the EU. To prevent possible harm to the environment or human health from uncontrolled waste disposal, recycle it responsibly to promote the sustainable reuse of material resources. To return your used device, please use the return and collection systems or contact the retailer where the product was purchased. They can take this product for environmental safe recycling.</p>
---	---

Manufactory	Shanghai Nanhua Electronics Co., Ltd
Address	Building 9, No.1755 Wenbei Road, Jiading District, Shanghai

Thanks for choosing our products, NANHUA Electronics is the professional brand of signal transmission and high quality industrial lighting which is trusted and loved by global users from various industries. Read and understand these instructions completely and carefully. Wrong installation and operation may lead to fires, electric shock, and others. Due to our continued efforts to improve our products, product specifications are subject to change without notice.

©NANHUA Electronics Co., Ltd. All rights reserved. www.nanhua.com